


# OCEANAIRE

## Low Temp Accessories

**ArcticAire**



- 2NK-1** (right) 4 inch diameter flexible nozzles used on 20AC12.
- 2NK-2** (left) 6 inch diameter flexible nozzles used on 20AC18, 24.
- 2NK-3** (center) 8 inch diameter flexible nozzles used on 20AC60.
- 2NK-4** (not pictured) 8 inch diameter flexible nozzles used on 20AC36.

**CK ... Ceiling Kit**, contains a 24 in. by 24 in. drop-in adapter with a duct collar (left), and a condenser air discharge collar for attachment to the unit (right). Screws and an 8 ft. length of flex duct is included in the kit. 12 in. duct and fittings handle the 20AC12, 18, 24 and 36. 16 in. duct and fittings handle the 20AC60.



- 2DDA Duct Adapter** used to apply a single discharge duct to the evaporator.
- 2DDA-6** fits 20AC12 and transitions to 6 in. round duct and can handle 25 equivalent ft.
- 2DDA-10** fits 20AC18, 24 and transitions to 10 in. round duct and can handle 50 equivalent ft.
- 2DDA-12** fits 20AC36 and transitions to 12 in. round duct and can handle 50 equivalent ft.
- 2DDA-16** fits 20AC60 and transitions to 16 in. round duct and can handle 80 equivalent ft.

**DEP ... Evaporator Inlet Air Plenum** attaches in place of the standard return air grille allowing a ducted return. Great for remote cooling of computer and equipment rooms. **DEP-10** fits 20AC12, uses one 10 in. duct and can handle 25 equivalent ft. **2DEP-12** fits 20AC18, 24 uses one 12 in. duct and can handle 25 equivalent ft. **DEP-16** fits 20AC36, 60 and uses one 16 in. duct. The 36 can handle 50 equivalent ft. and the 60 can handle 80 equivalent ft.



**2DPC-1** (115v) and **2DPC-2** (230v) **Condensate Pump**. Complete with overflow safety switch, check valve, 20 ft. heat and quick connect plug-in. Standard on the 20AC60, optional on all other ArcticAire models. Very easy to install.


**2DCP ... Condenser Inlet Air Plenum** allows condenser air to be ducted into the unit from outside the conditioned space if required. This also eliminates negative air pressure in the space being cooled by eliminating infiltration. **2DCP-1** fits 20AC12, uses one 12 in. duct and can handle 25 equivalent ft. **2DCP-2** fits 20AC18, 24, uses one 12 in. duct and can handle 50 equivalent ft. **2DCP-3** fits 20AC 35, uses one 12 in. duct and can handle 50 equivalent ft. **2DCP-4** fits 20AC60, uses 2 12 in. ducts and can handle 80 equivalent ft.



*Single inlet condenser plenum used on all models except 5-ton.*



*Dual inlet plenum used on the 5-ton.*

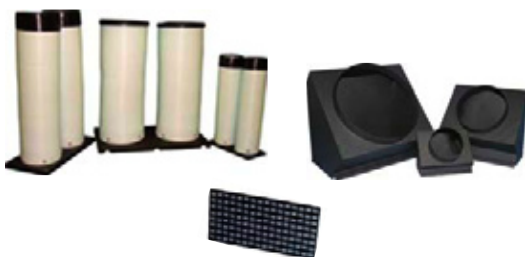

A side by side look comparing the duct adapter for a single duct run (right), to the nozzles with 2 discharge ducts (left). The grille (center) is standard equipment.

**Spot Coolers**  
**800.367.8675**  
[www.spot-coolers.com](http://www.spot-coolers.com)