

5T 208/3

Spot Coolers

Cooling Capacity	Btu/hr. @ 80° Drybulb and 67° Wetbulb Entering Air Temperature.	63,500
Heating Capacity	Btu/hr.	Optional
Dimensions	Width (Inches) Depth (Inches) Height (Inches) Weight (Pounds)	34 57 43 675
Electrical Characteristics	Power Supply (Volts) Power Consumption (Kilowatts) Current Consumption (Amperes) Service Required (Amperes) Min-max Voltage Power Cord Gauge Power Cord Length (Feet)	208/230/60/ 3 Phase 9.3 35 60 200-240 4 110
Evaporator Fan	Evaporator: Fan Type Air Flow (CFM) Max. External Static Pressure (Inches Of Water Gauge) Supply/Return Flanges Flange Diameter (Inches) Maximum Length of Ducting (Feet)	Centrifugal 2000 1 1/1 14 85
Compressor	Compressor Type R22 Charge (Pounds) Operating Range	Hermetic Scroll 13.0 65°F - 115°F
Miscellaneous	Remote Thermostat Compressor Overload Relay Fan Motor Protection Anti-freeze Thermostat High-Pressure Switch Compressor Short-cycle Protection Accommodates Condensate pump Humidity Removed @60% RH (Gallons per Hour) Low Pressure Switch Phase Protection Low Ambient Operation	Optional Optional Optional Optional Yes Yes Yes 2.5 Yes N/A Optional

5T 208/3

Power Supply 208/230 volts 60 hertz 3 phase 60 amperes

Width 34 inches


Depth 57 inches

Height 43 inches


Weight 675 lbs.

All models are backed by a 12-month parts warranty.


TOP

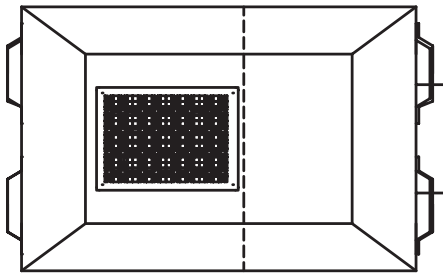


SIDE

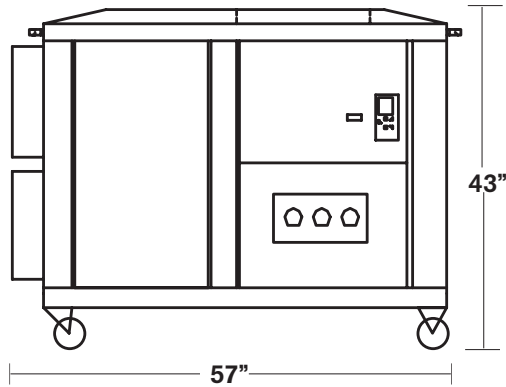

BACK

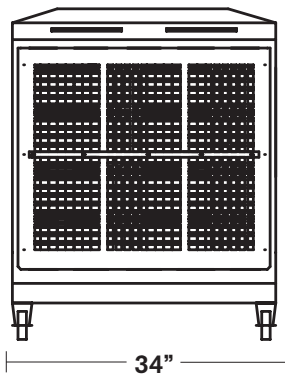

FRONT



SUPPLY
14"

RETURN
14"

800.367.8675 • www.spot-coolers.com

Copyright © 2008 Spot Coolers, Inc. All rights reserved.

