

OWC 6012

Cooling Capacity	BTU/Hr. @ 80°F Air Temperature 85°F Entering Water Temperature	60,100
Dimensions	Width (Inches) Depth (Inches) Height (Inches) Weight (Pounds) Shipping Weight	29 39 52 460 500
Electrical Characteristics	Power Supply (Volts) Power Consumption (Kilowatts) Current Consumption (Amperes) Fuse Size (Amperes) NEMA Plug Configuration Min-max Voltage Power Cord Gauge Power Cord Length (Feet)	208/230/60/1 Phase 5.4 Cooling 20.7 Cooling 30 6-30P 195-250 Volt 10AWG (3 Core) 10
Compressor Characteristics	Compressor Type R 22 charge (Ounces) Operating Conditions: Min-max °F	Hermetic Scroll 46 55°-105°F, 50% RH
Fan Characteristics	Evaporator: Fan Type 6 Speed Air Flow (CFM) High/Low Max. External Static Pressure (Inches Of Water Gauge)	Centrifugal 1950/1750 0.50
Condenser Water Flow	Automatic Water Regulating Valve Inlet Water Temp. 85°F–95°F Exit Inlet Water Temp. 75°F–95°F Exit Inlet Water Temp. 65°F–95°F Exit Inlet Water Temp. 55°F–95°F Exit	Yes 15.00 GPM 8.70 GPM 5.85 GPM 4.35 GPM
Miscellaneous Features	Thermostat Built-in Condensate Pump with 20Ft. Lift Check Valve with Safety Switch High-Pressure Switch Water Connections (supply and return) Condensate Connection Hose Kits Available 10'–25'–40' Optional Heat Pump Unit Available Optional Tower Application Unit Available Sound Level (Db) High/Low	Yes Yes Yes Yes 5/8 Inch MF 3/8 Inch MF Yes No Yes 69/64

* available in 208/230/3 phase
** available in 460/3 phase

OWC 6012

Power Supply 208/230 volts 60 hertz 1 phase 20.7 amperes


Width 29 inches

Depth 39 inches

Height 52 inches

Weight (net/shipping) lbs 460/500

All models are backed by a 12-month warranty with 60 months for the compressor.

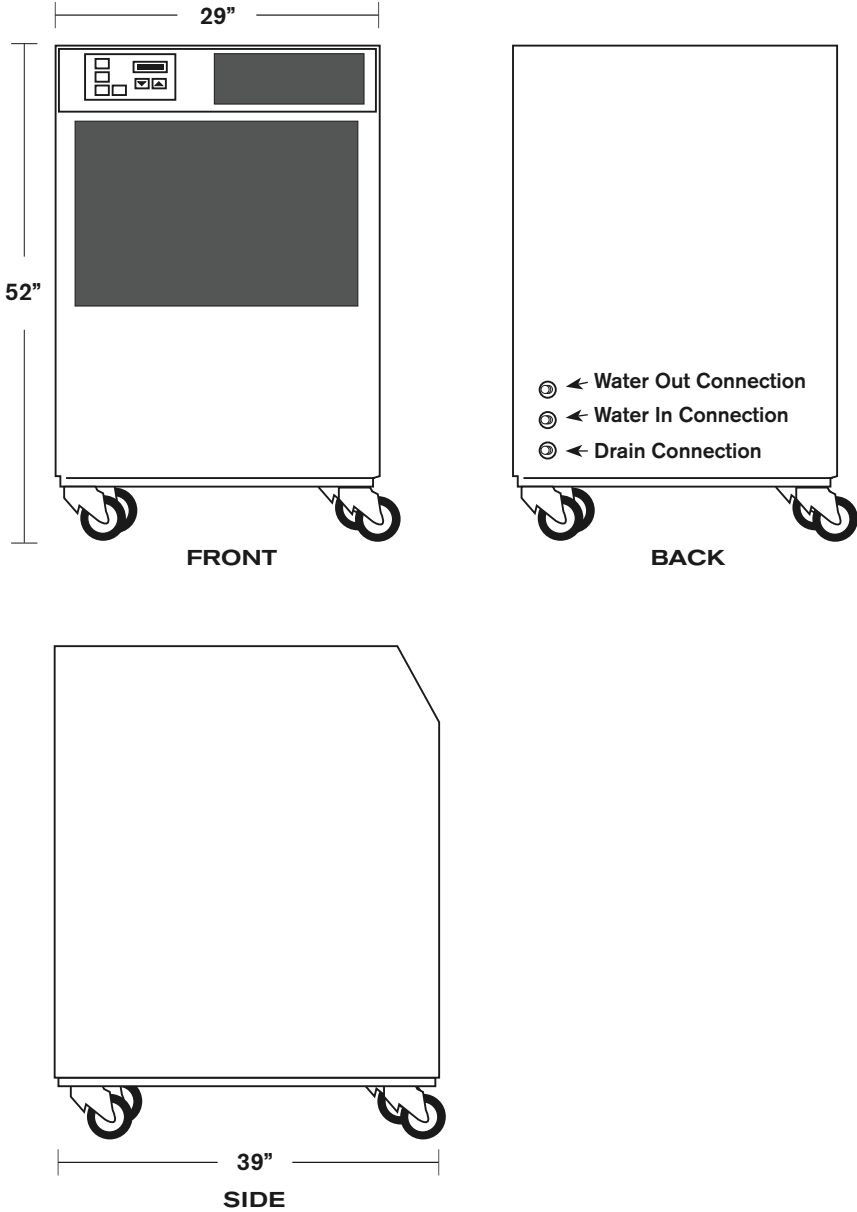

Spot Coolers