



## Portable Specialty Coolers Air Conditioners

# Climate Pro® 12

<b>Cooling Capacity</b>	Btu/Hr @ 80°F at 50% Relative Humidity	10,200
<b>Heating Capacity</b>	Btu/Hr @ 70°F Indoors, 47° Outdoors at 57% Relative Humidity	9,900
<b>Dimensions</b>	Width (Inches)	21
	Depth (Inches)	27
	Height (Inches)	44
	Weight (Pounds)	196
	Shipping Weight	238
<b>Electrical Characteristics</b>	Power Supply (Volts)	115/1
	Power Consumption (Kilowatts)	1.25
	Current Consumption	11.1
	Fuse Size (Amperes)	15
	NEMA Plug Configuration	5 -15p
	Min-max Voltage	105-125
	Power Cord Gauge	14/3
	Power Cord Length (Feet)	10
<b>Compressor Characteristics</b>	Compressor Type	Hermetic Rotary
	Refrigerant	R-410A
	Operating Conditions: Min-max °F	65°-95°F @ 50% RH
	Operating Conditions (Heating): Min-max °F	40°-80°F @ 50% RH
<b>Fan Characteristics</b>	<b>Evaporator:</b>	
	Fan Type	Centrifugal
	Air Flow (CFM) High/Medium/Low	420/340/280
	Max External Static Pressure (Inches Of Water Gauge)	0.31
	<b>Condenser:</b>	
	Fan Type	Centrifugal
	Air Flow (CFM)	760
	Max External Static Pressure (Inches Of Water Gauge)	0.23
<b>Safety Devices</b>	Compressor Overload Relay	Yes
	Fan Motor Protection	Yes
	Anti-freeze Thermostat	Yes
	Automatic Tank Shut-off	Yes
	Condensate Tank Capacity (Gallons)	5
	High-pressure Switch	Yes
	Compressor Short-Cycle Protection	Yes
	Fan Mode Switch	Yes
	Automatic Restart	Yes
	Thermostat	Yes
	Control Panel	Programmable
	Thermostat Control	Digital
<b>Miscellaneous Features</b>	Humidity Removed @ 60% RH	0.9
	Accommodates Condensate Pump	Yes
	Sound Level (dB) High/Low	61/59
	Max Evaporator Ducting Length* (Ft)	30
	Max Condenser Ducting Length* (Ft)	100
	<i>* subtract 10 Ft For Every 90° Bend</i>	



## Portable Specialty Coolers Air Conditioners

# Climate Pro® 12

**Power Supply** 115 volts 60 hertz 1 phase 11.1 amperes

**Width** 21 inches


**Depth** 27 inches

**Height** 44 inches


**Weight** (net/shipping) lbs 196/238

All models are backed by a 12-month warranty with 36 months for the compressor.  
All coils are treated with an acrylic resin coating for extended life and corrosion resistance.

TOP

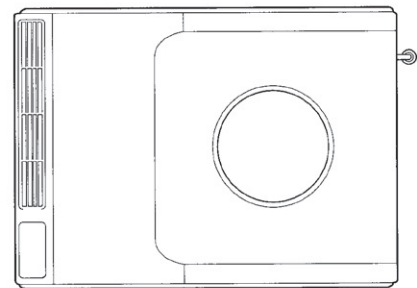

FRONT

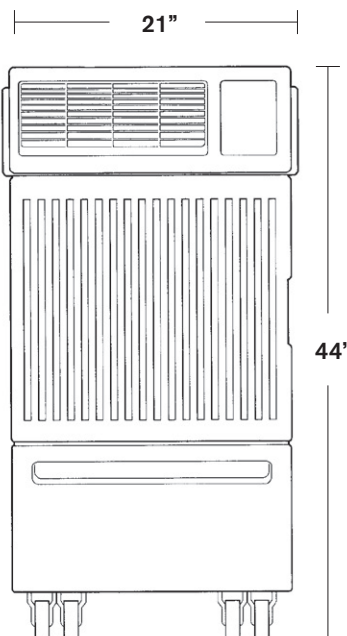

SIDE

