

# 20AC 2412

<b>Cooling Capacity</b>	BTU/Hr. @ ARI 80°F – 67° At 52% Relative Humidity	23,500
<b>Dimensions</b>	Width (Inches) Depth (Inches) Height (Inches) Weight (Pounds) Shipping Weight	24 30 45 250 290
<b>Electrical Characteristics</b>	Power Supply (Volts) Power Consumption (Kilowatts) Current Consumption (Amperes) Fuse Size (Amperes) NEMA Plug Configuration Min-max Voltage Power Cord Gauge Power Cord Length (Feet)	208/230/60/1 Phase 2.2 Cooling 12.3 Cooling 20 6-20P 197-253 Volt 14AWG (3 Core) 10
<b>Compressor Characteristics</b>	Compressor Type R 22 charge (Ounces) Operating Conditions: Min-max °F	Hermetic Rotary 40 55°-105°F, 50% RH
<b>Fan Characteristics</b>	<b>Evaporator:</b> Fan Type 6 Speed Air Flow (CFM) High/Low Max. External Static Pressure (Inches Of Water Gauge) <b>Condenser:</b> Fan Type Air Flow (CFM) Max. External Static Pressure (Inches Of Water Gauge)	Reverse Curved 810/680 0.25  Reverse Curved 1100 0.25
<b>Safety Devices</b>	Compressor Overload Relay Fan Motor Protection Anti-freeze Thermostat Automatic Tank Shut-off (Adj. Level) Condensate Tank Capacity (Gallons) High-pressure Switch Compressor Short-cycle Protection Fan Mode Switch Automatic Restart Thermostat	Yes Yes No Yes 5 Yes Yes Yes Yes Yes Digital
<b>Miscellaneous Features</b>	Operating Cost (Approximate/Hr.) Humidity Removed @ 60% RH (Gal/Hr.) Accommodates Condensate Pump Sound Level (Db) High/Low Max Evaporator Ducting Length*(Ft.) Max Condenser Ducting Length*(Ft.)	\$0.23 1.7 Yes 64/62 25 50

\*Subtract 10 Ft. For Every 90° Bend

# 20AC 2412

**Power Supply** 208/230 volts 60 hertz 1 phase 12.3 amperes


**Width** 24 inches

**Depth** 30 inches


**Height** 45 inches

**Weight** (net/shipping) lbs 250/290


All models are backed by a 12-month warranty with 60 months for the compressor.

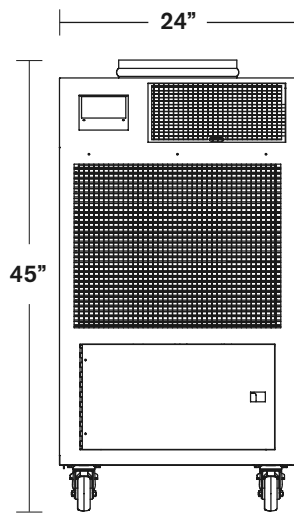


FRONT

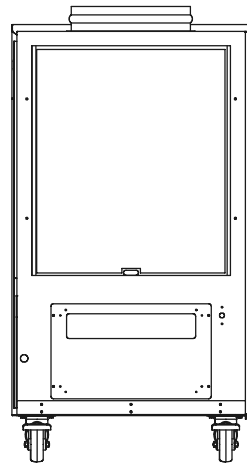

BACK

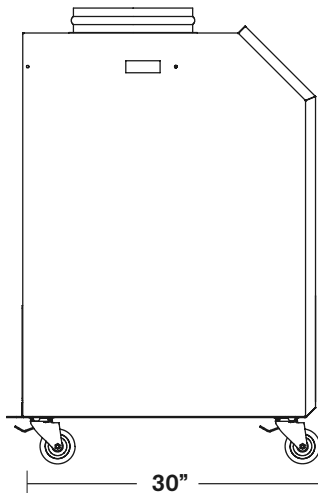

SIDE



TOP

Spot Coolers

800.367.8675 • [www.spot-coolers.com](http://www.spot-coolers.com)

Copyright © 2008 Spot Coolers, Inc. All rights reserved.