

# 5T 208/1

Spot Coolers

<b>Cooling Capacity</b>	Btu/hr. @ 80° Drybulb and 67° Wetbulb Entering Air Temperature.	63,500
<b>Heating Capacity</b>	Btu/hr.	Optional
<b>Dimensions</b>	Width (Inches) Depth (Inches) Height (Inches) Weight (Pounds)	34 57 43 675
<b>Electrical Characteristics</b>	Power Supply (Volts) Power Consumption (Kilowatts) Current Consumption (Amperes) Service Required (Amperes) Min-max Voltage Power Cord Gauge Power Cord Length (Feet)	208/230/60/ 1 Phase 7.7 53 60 200-240 4 110
<b>Evaporator Fan</b>	<b>Evaporator:</b> Fan Type Air Flow (CFM) Max. External Static Pressure (Inches Of Water Gauge) Supply/Return Flanges Flange Diameter (Inches) Maximum Length of Ducting (Feet)	Centrifugal 2000 1 1/1 14 85
<b>Compressor</b>	Compressor Type R22 Charge (Pounds) Operating Range	Hermetic Scroll 13.0 65°F - 115°F
<b>Miscellaneous</b>	Remote Thermostat Compressor Overload Relay Fan Motor Protection Anti-freeze Thermostat High-Pressure Switch Compressor Short-cycle Protection Accommodates Condensate pump Humidity Removed @60% RH (Gallons per Hour) Low Pressure Switch Phase Protection Low Ambient Operation	Optional Optional Optional Optional Yes Yes Yes 2.5 Yes N/A Optional

# 5T 208/1

**Power Supply** 208/230 volts 60 hertz 1 phase 60 amperes

**Width** 34 inches


**Depth** 57 inches

**Height** 43 inches


**Weight** 675 lbs.

All models are backed by a 12-month parts warranty.


**TOP**

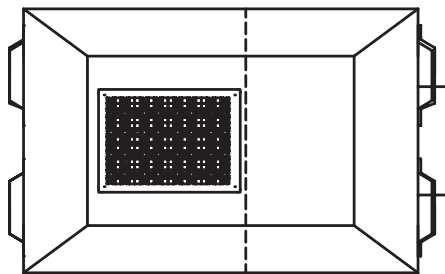


**SIDE**

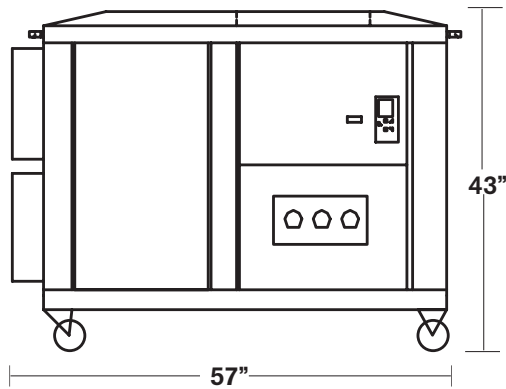

**BACK**

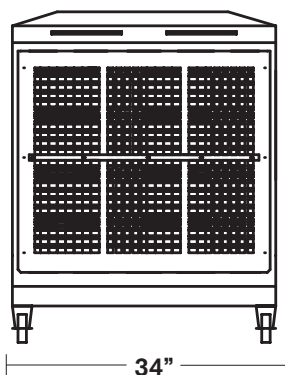

**FRONT**



**SUPPLY**  
14"

**RETURN**  
14"

**800.367.8675 • www.spot-coolers.com**

Copyright © 2008 Spot Coolers, Inc. All rights reserved.

